


3.8V-60V Vin, 1.5A, High Efficiency Step-down DCDC Converter with Programmable Frequency


•
•

•
•
•
•
•
•
•
•
•
•
•
•


- (1)
- (2)

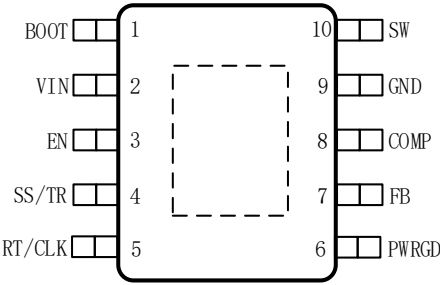




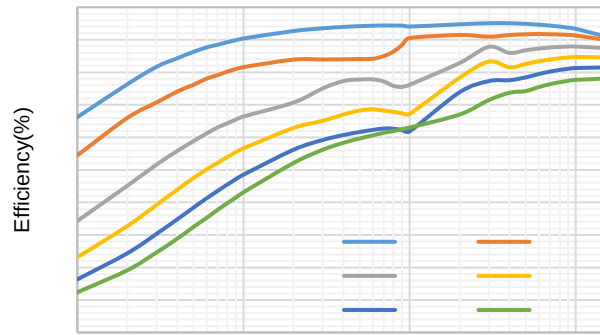


Output Current(A)

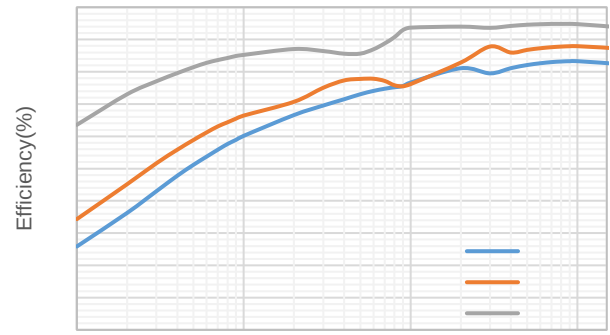


Output Current(A)

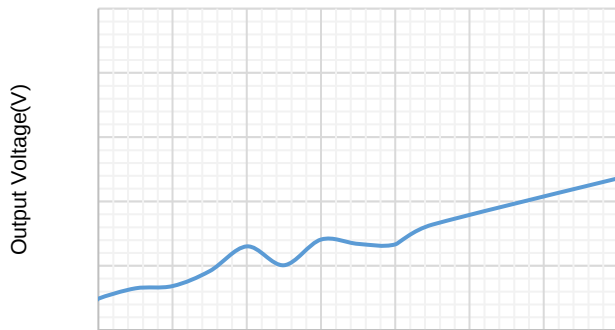


Output Current(A)

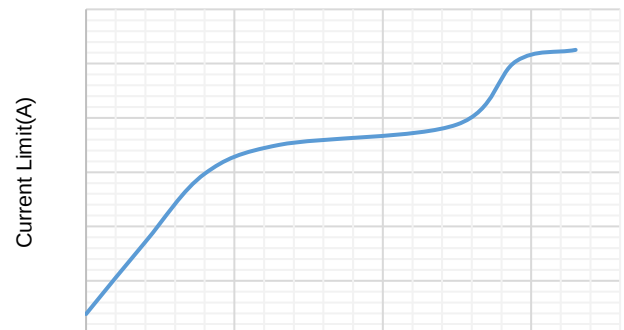


Temperature(°C)

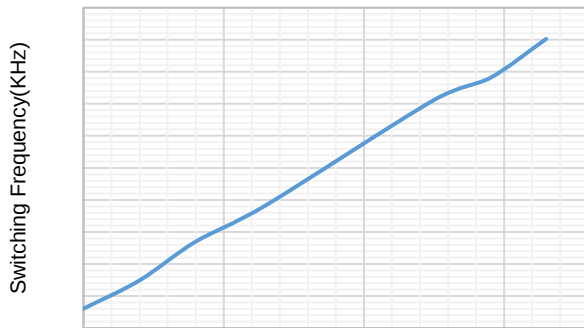


Temperature(°C)

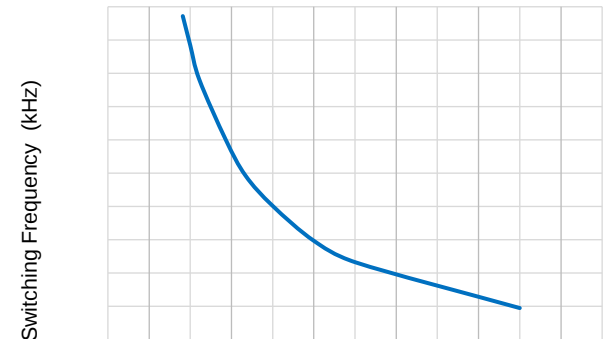

Switching Frequency (kHz)

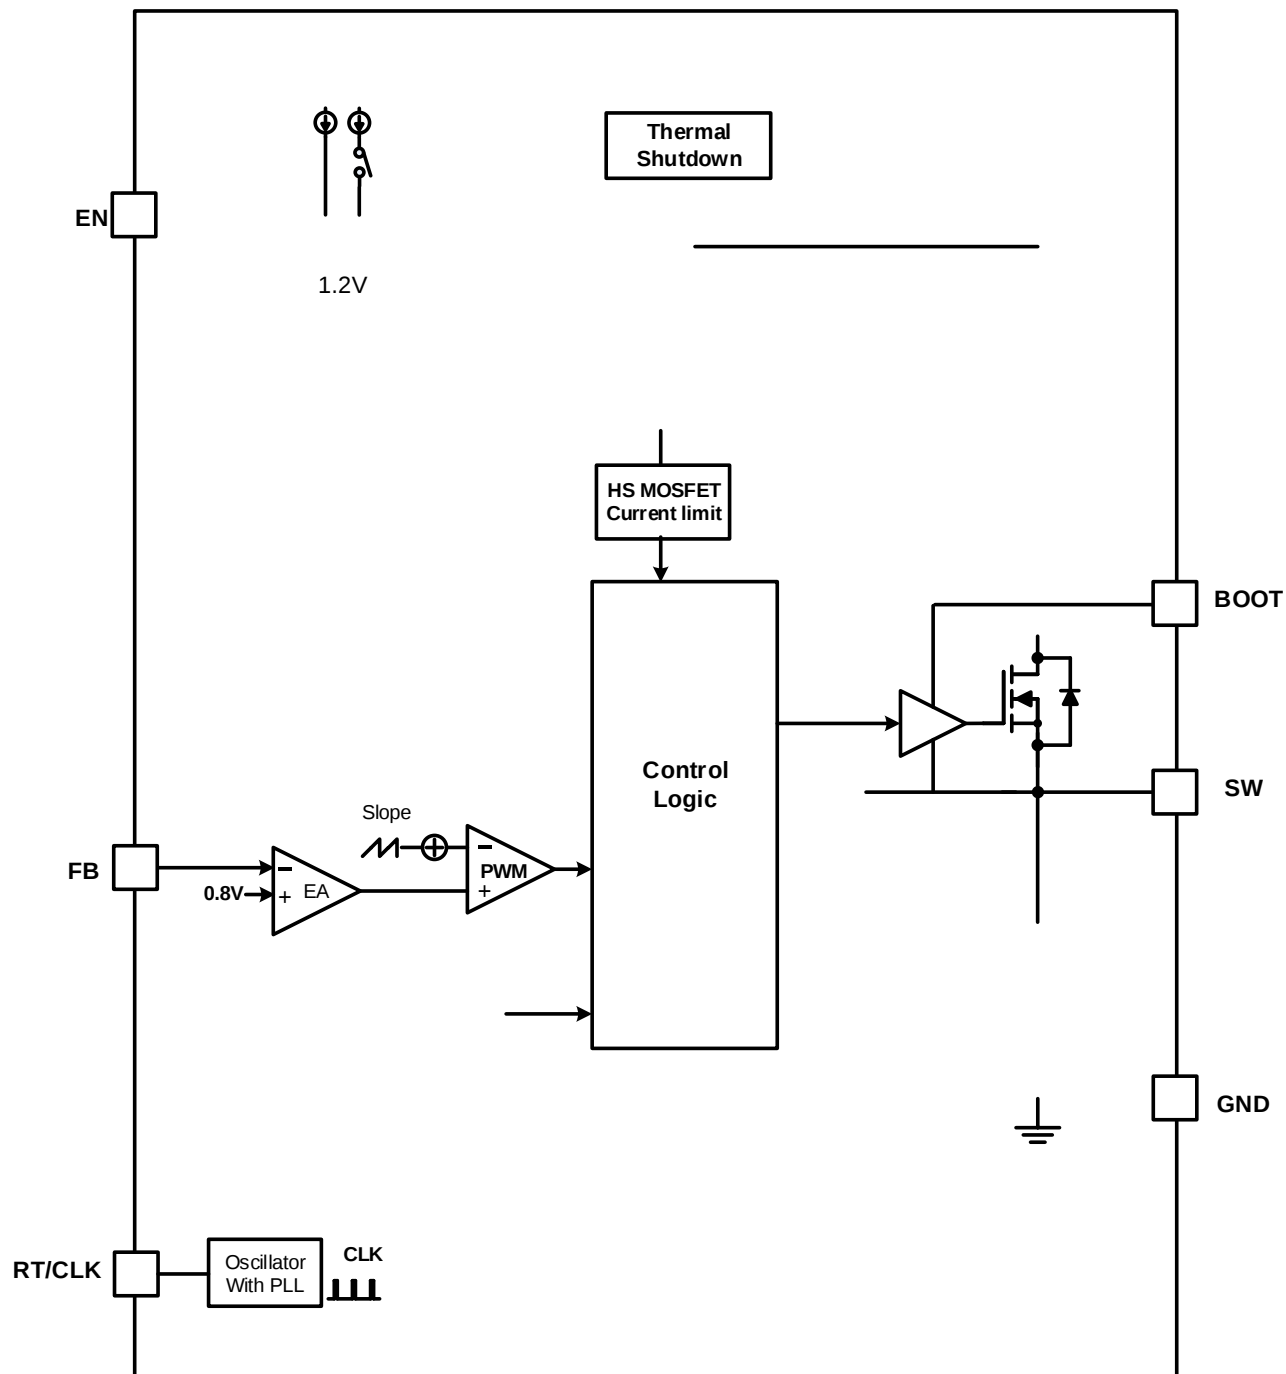


Overview



-
-

Output Voltage

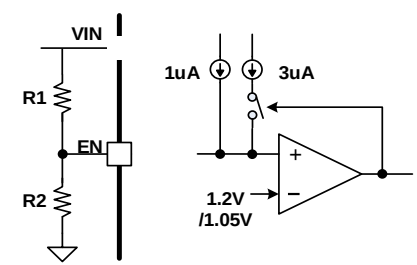


±

—

-
-


33333

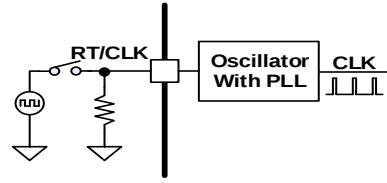

Bootstrap Voltage Regulator and Low Drop-out Operation

Over Current Limit

Typical Application

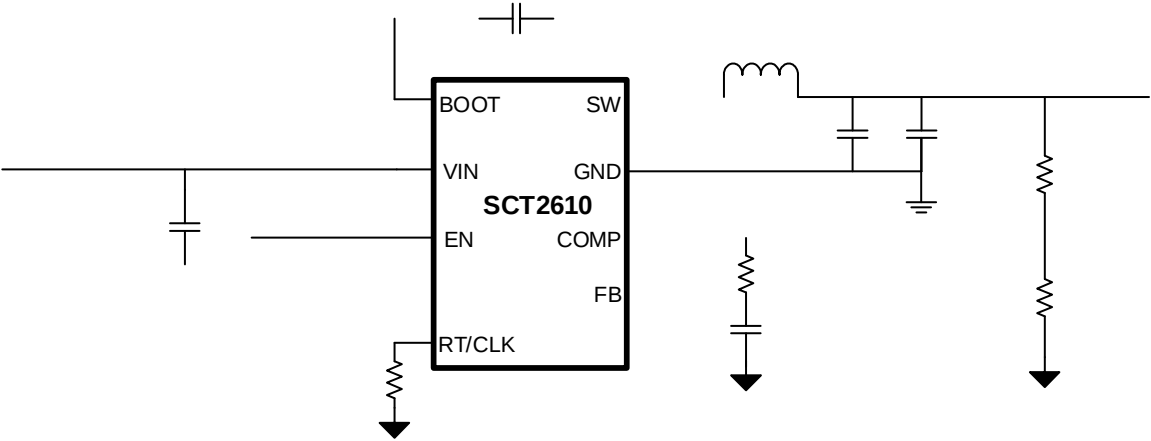

Design Parameters

5 5







5 5

-
-
-

5


5


5

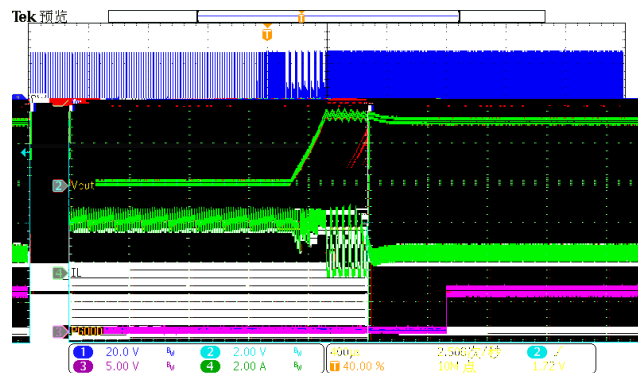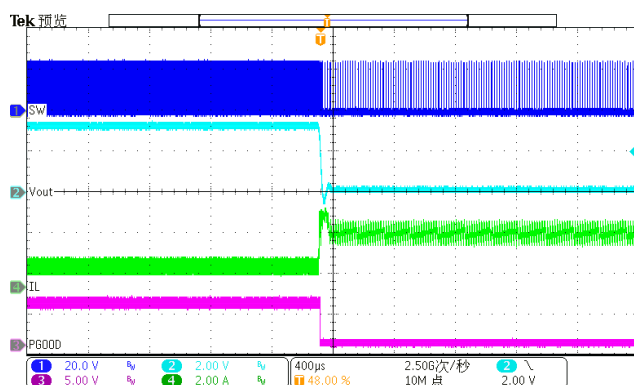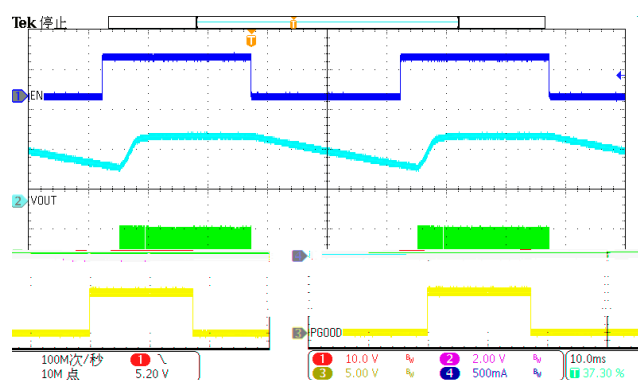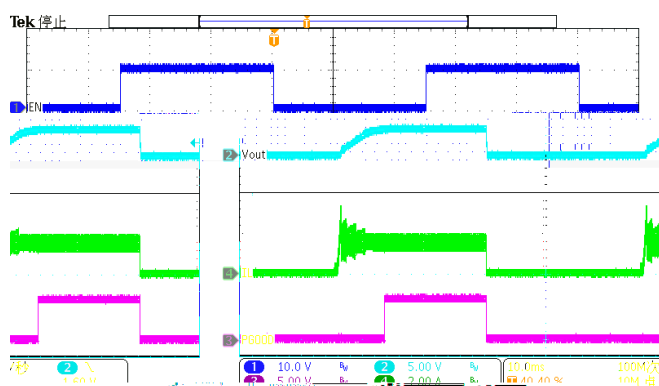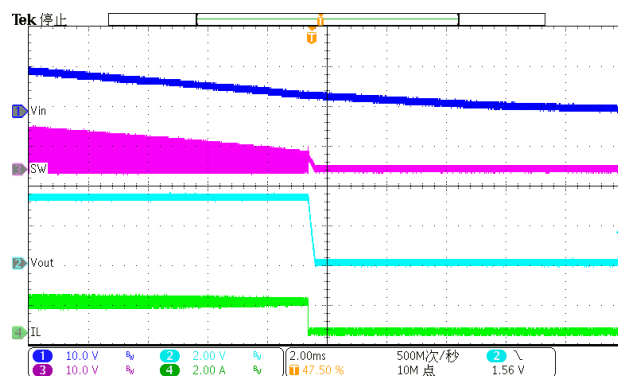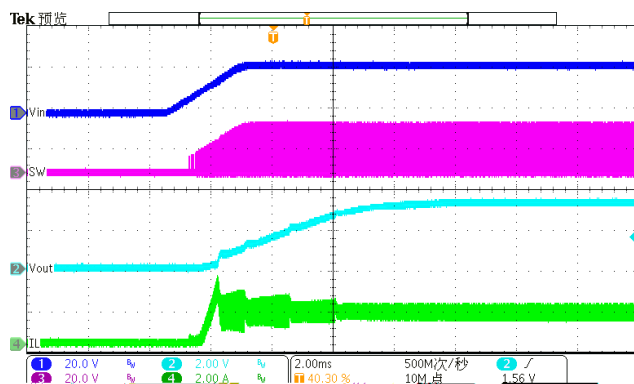

Layout Guideline

- 1.
- 2.
- 3.
- 4.
- 5.
- 6.
- 7.
- 8.
- 9.
- 10.

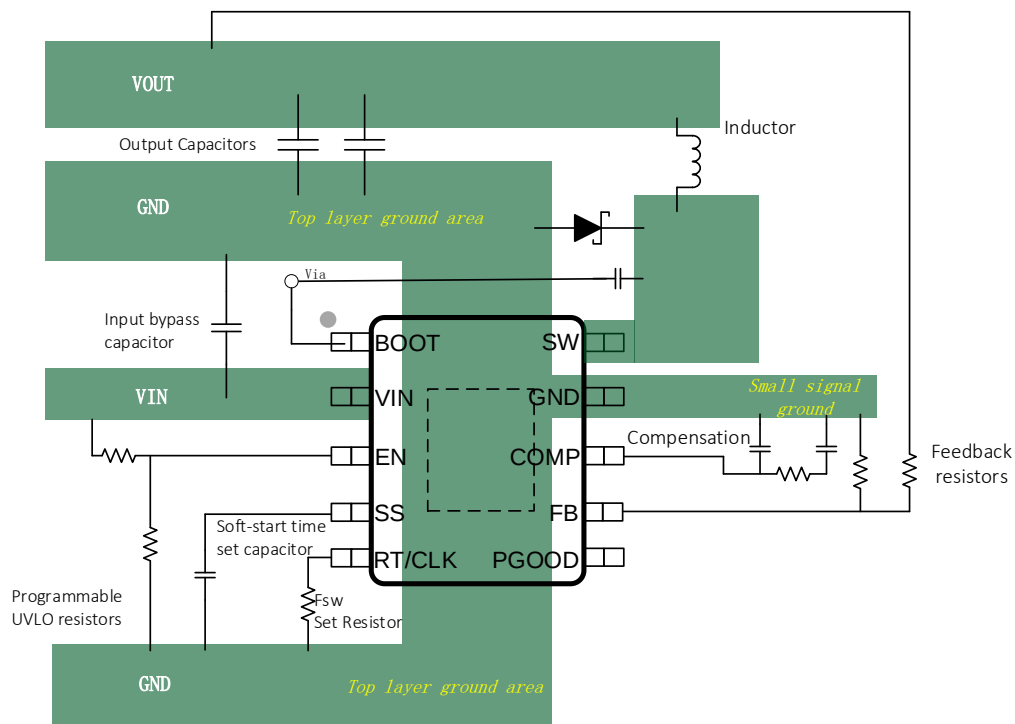

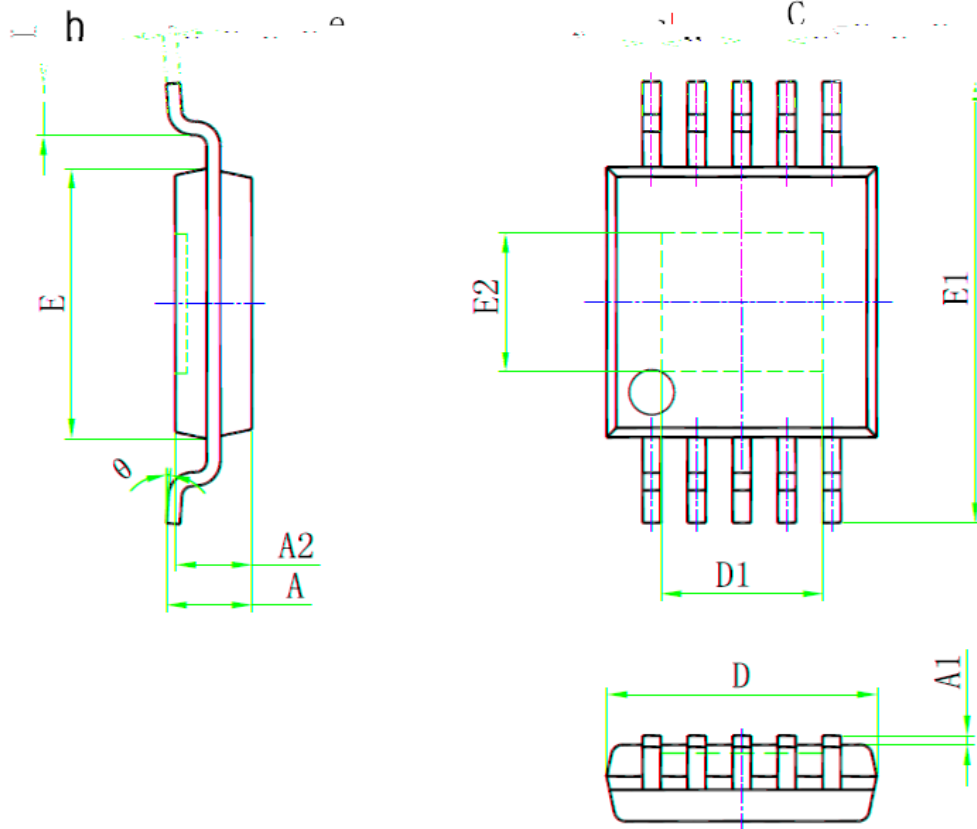

θ				

- 1.
- 2.
- 3.
- 4.
- 5.
- 6.

