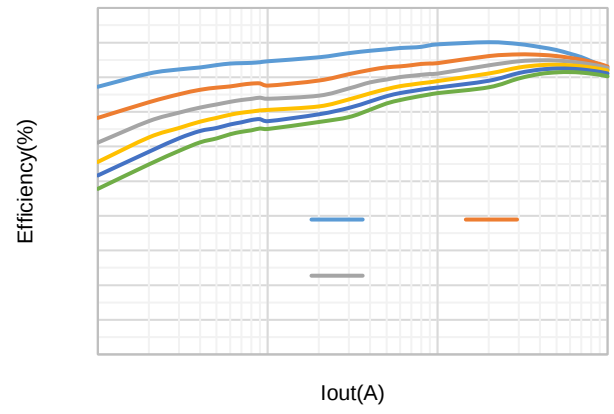
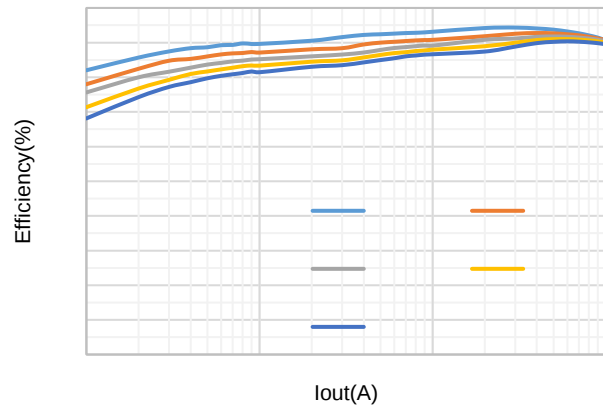
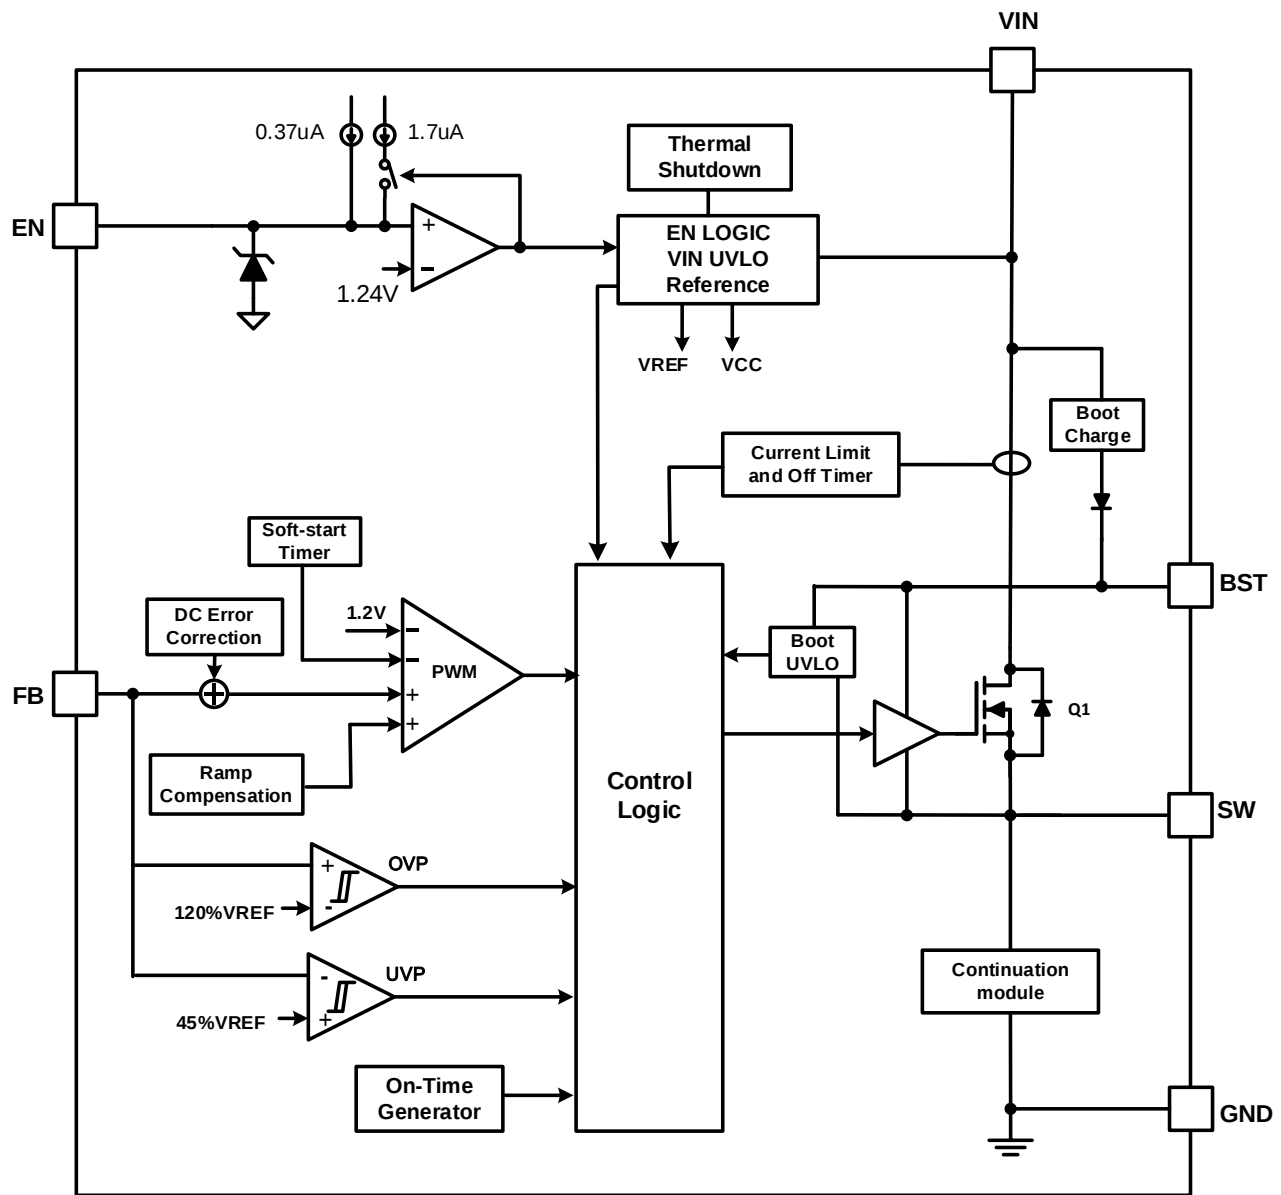






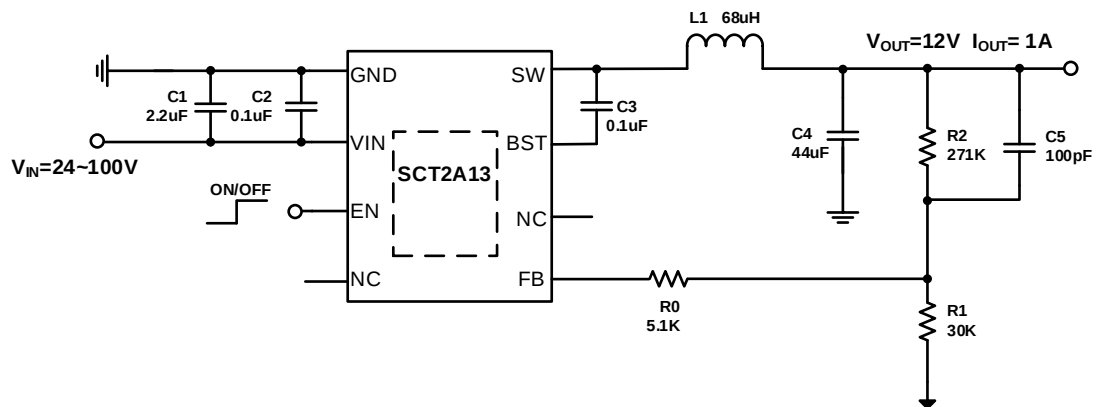








Table 1. R_1 , R_2 Value for Common Output Voltage
(Room Temperature)






•



-
- -
 -
 -
 -

-
-
-
-
-
-

-
-
-
-

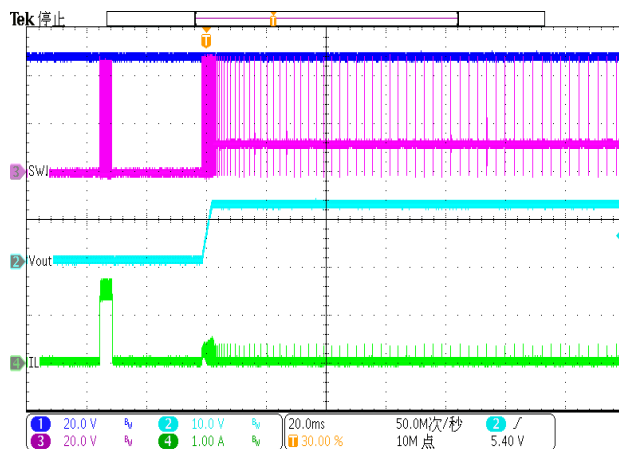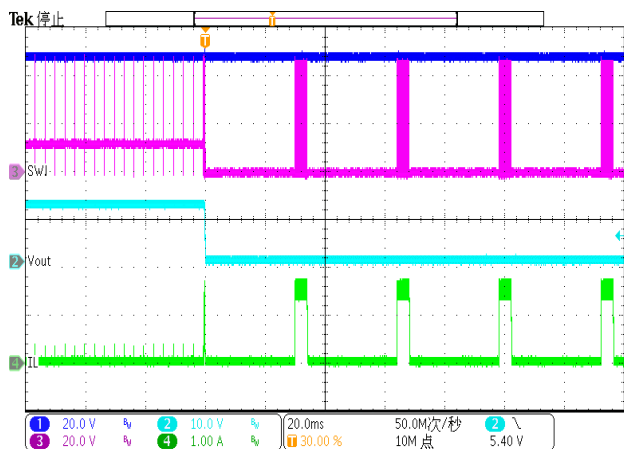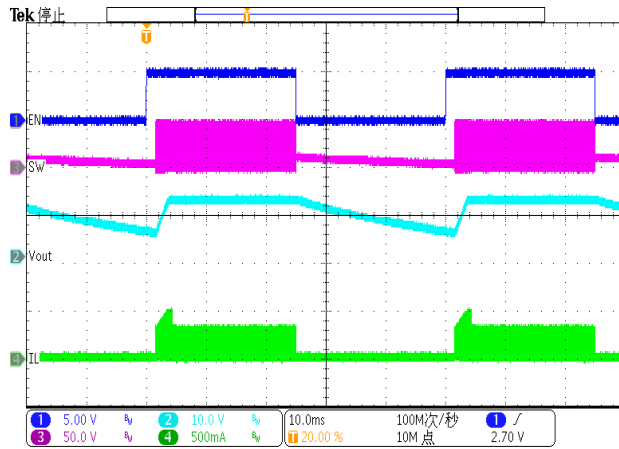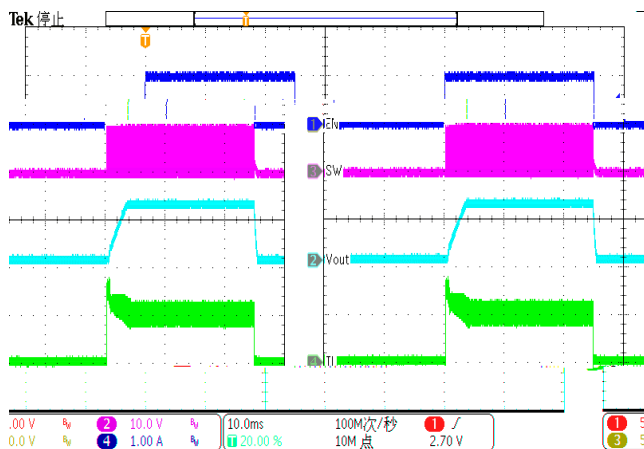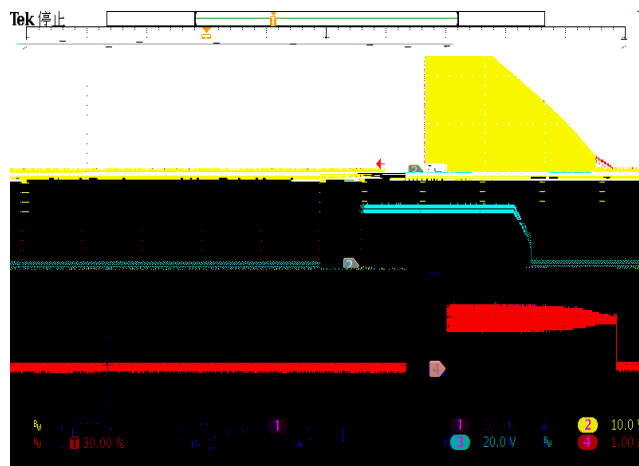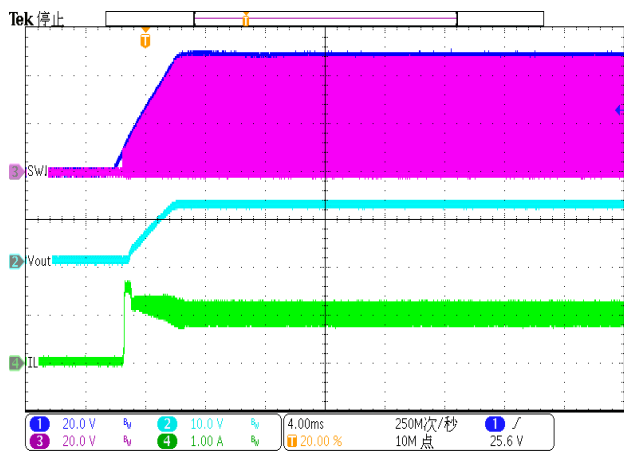

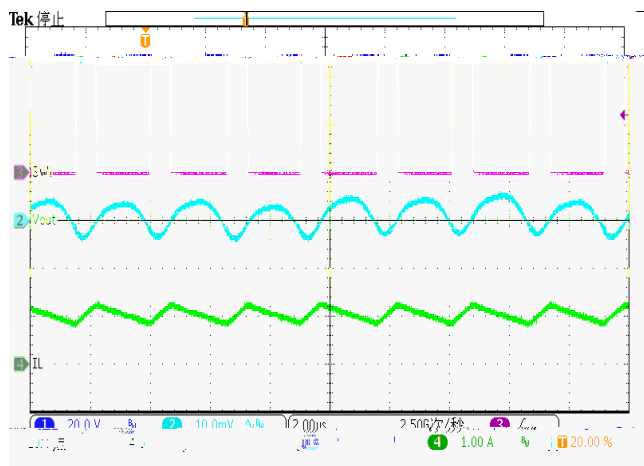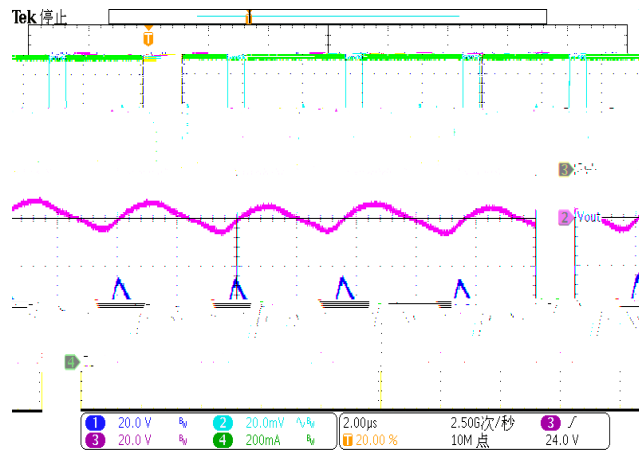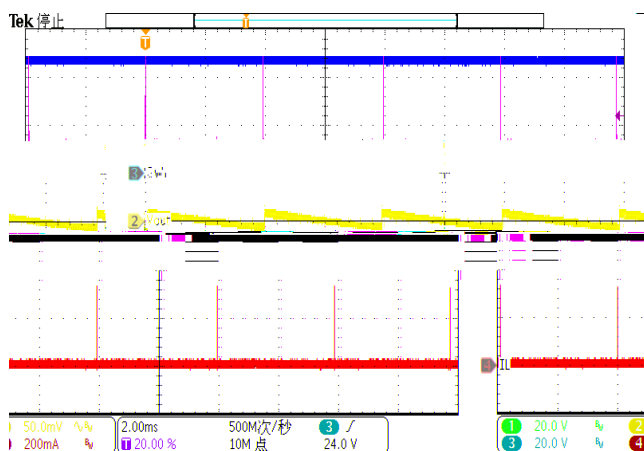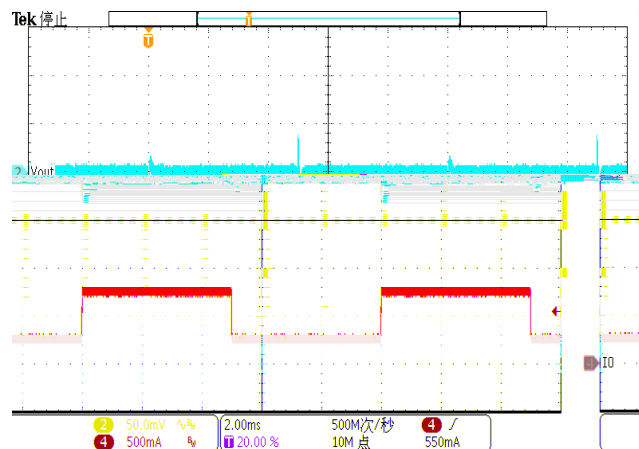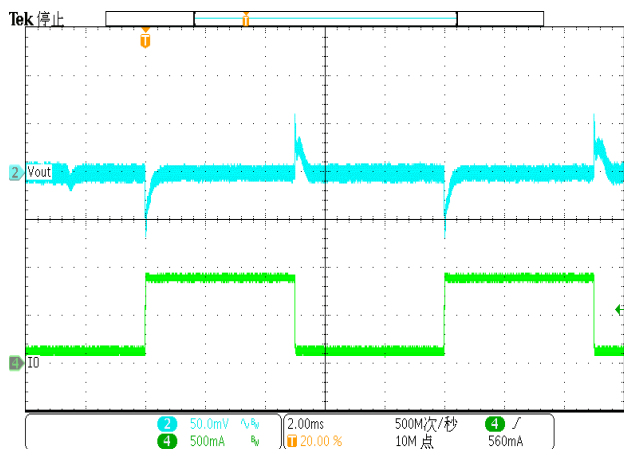

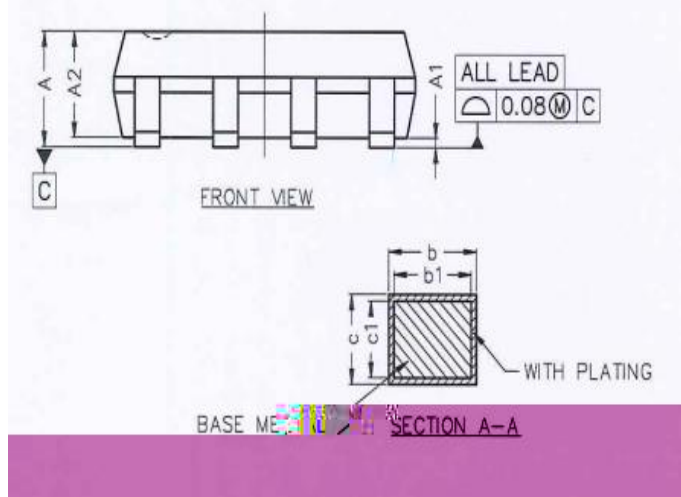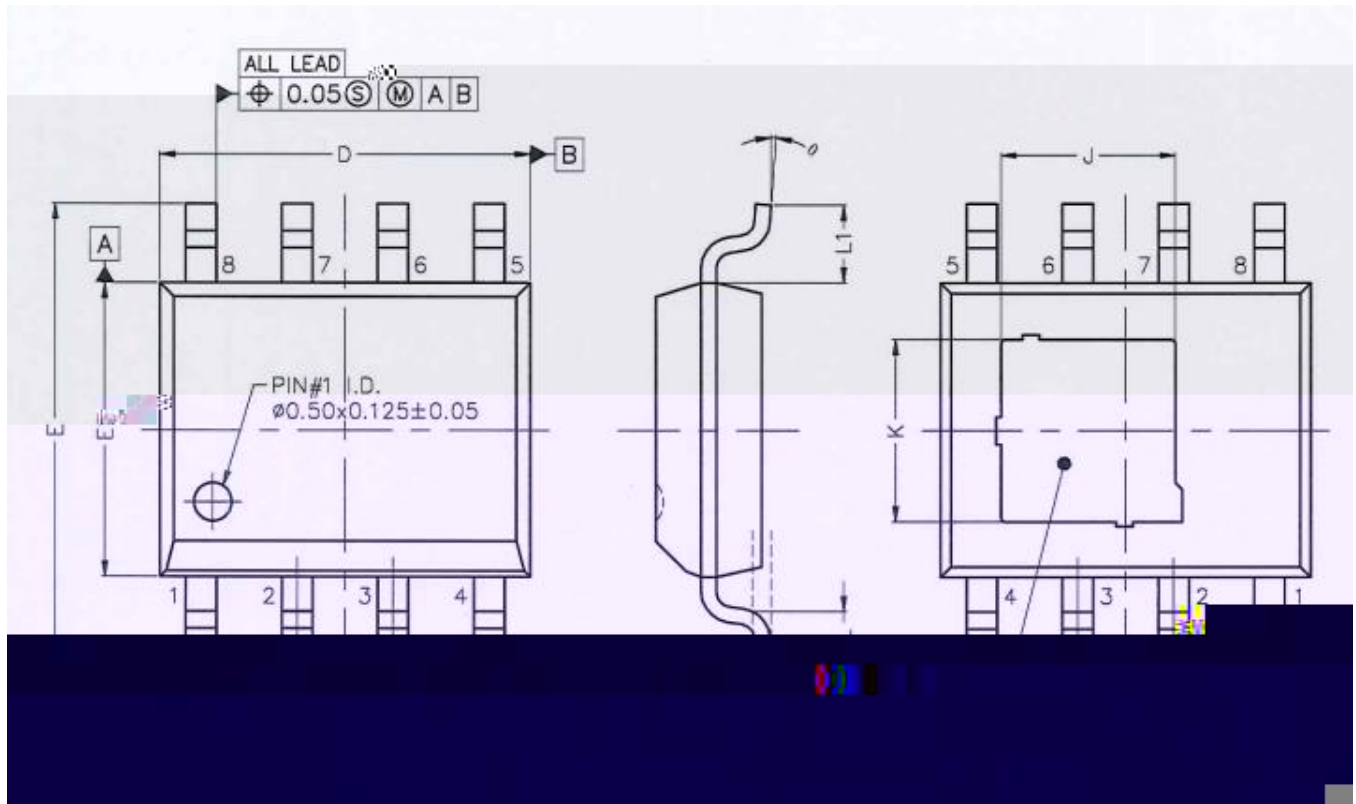

		SYMBOL	MIN	NOM	MAX
TOTAL THICKNESS		A	—	—	1.75
STAND OFF		A1	0.05	0.125	0.20
MOLD TOTAL THICKNESS		A2	1.30	1.40	1.60
LEAD WIDTH		b	0.31	—	0.53
LEAD WIDTH		b1	0.30	0.40	0.50
LEAD THICKNESS		c	0.20	—	0.24
LEAD THICKNESS		c1	0.19	0.203	0.21
MOLD LENGTH		D	4.80	4.90	5.00
MOLD WIDTH		E1	3.80	3.90	4.00
LEAD SPAN		E	5.80	6.00	6.20
LEAD PITCH		e	1.27 BSC		
EXPOSED PAD SIZE	X	J	2.15	2.30	2.45
	Y	K	2.25	2.40	2.55
LEAD LENGTH		L1	1.05 REF		
LEAD SOLE LENGTH		L	0.40	0.60	0.80
LEAD FORM ANGLE		θ	0°	—	8°

