FEATURES

- &" !%
- %!%
- %
- ! %& & &' ' ! □ " %& %& (" %

SCT CONFIDENTIAL

TYPICAL APPLICATION

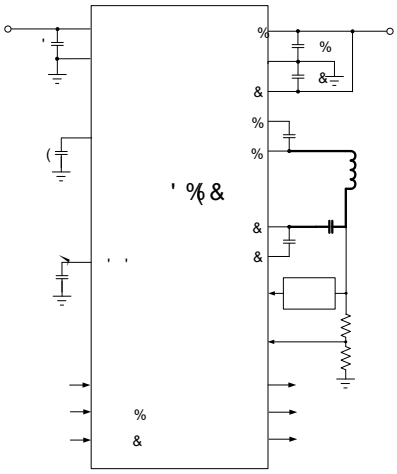

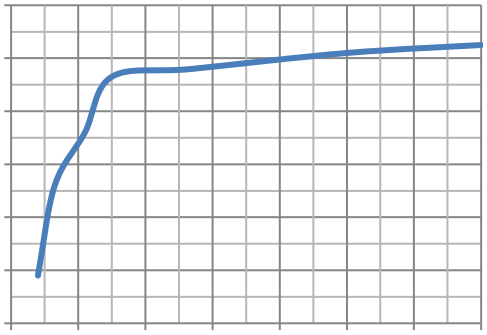

REVISION HISTORY

" "

DEVICE ORDER INFORMATION

' %&			%&	%	' '!%	'

ABSOLUTE MAXIMUM RATINGS

! %

	! "	%	
% &	! "	%	
% &	!%	%	
% &	! "	&(	
% % &! &	! "		
' ' %	! "		
&			
&□	!(	%	
	!	%	

%□ "

"

&□ " %

"

"

PIN CONFIGURATION

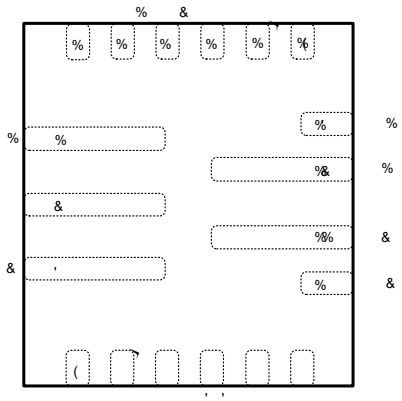

SCT CONFIDEN

SCT CONFIDENTI

S

TYPICAL CHARACTERISTICS

% & %&

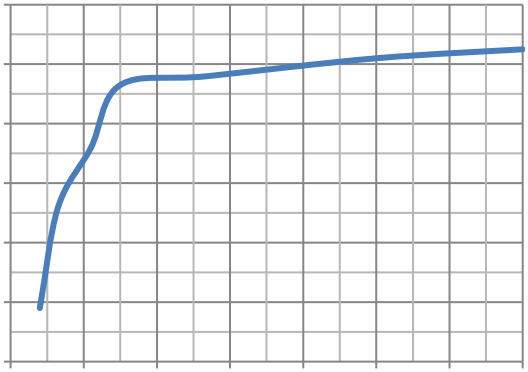

& "

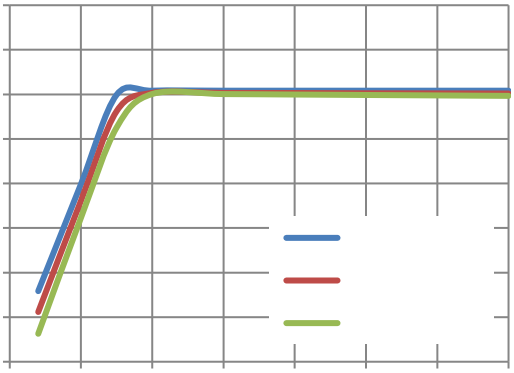

&"

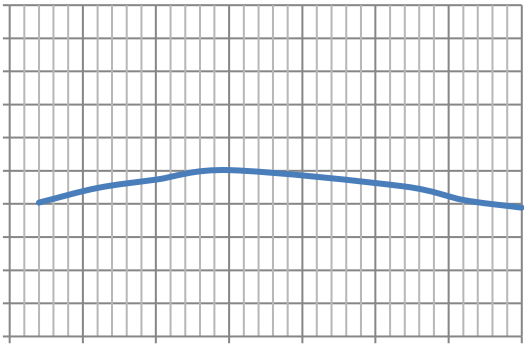

' "

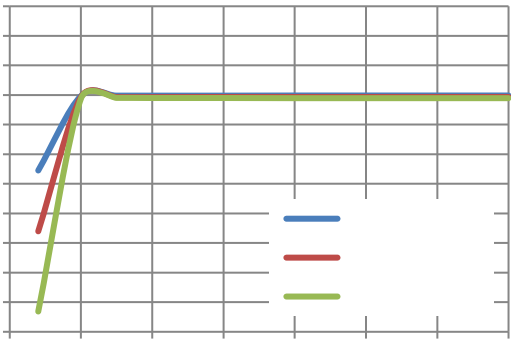

(" %&

"' "

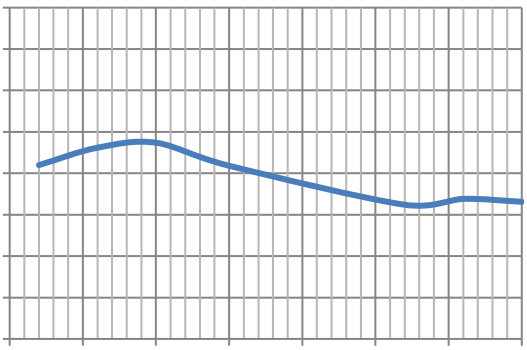

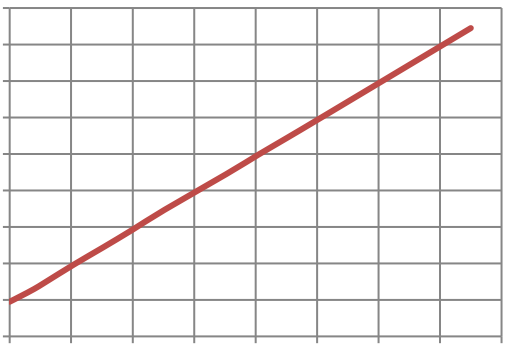

"' " %&

"

FUNCTIONAL BLOCK DIAGRAM

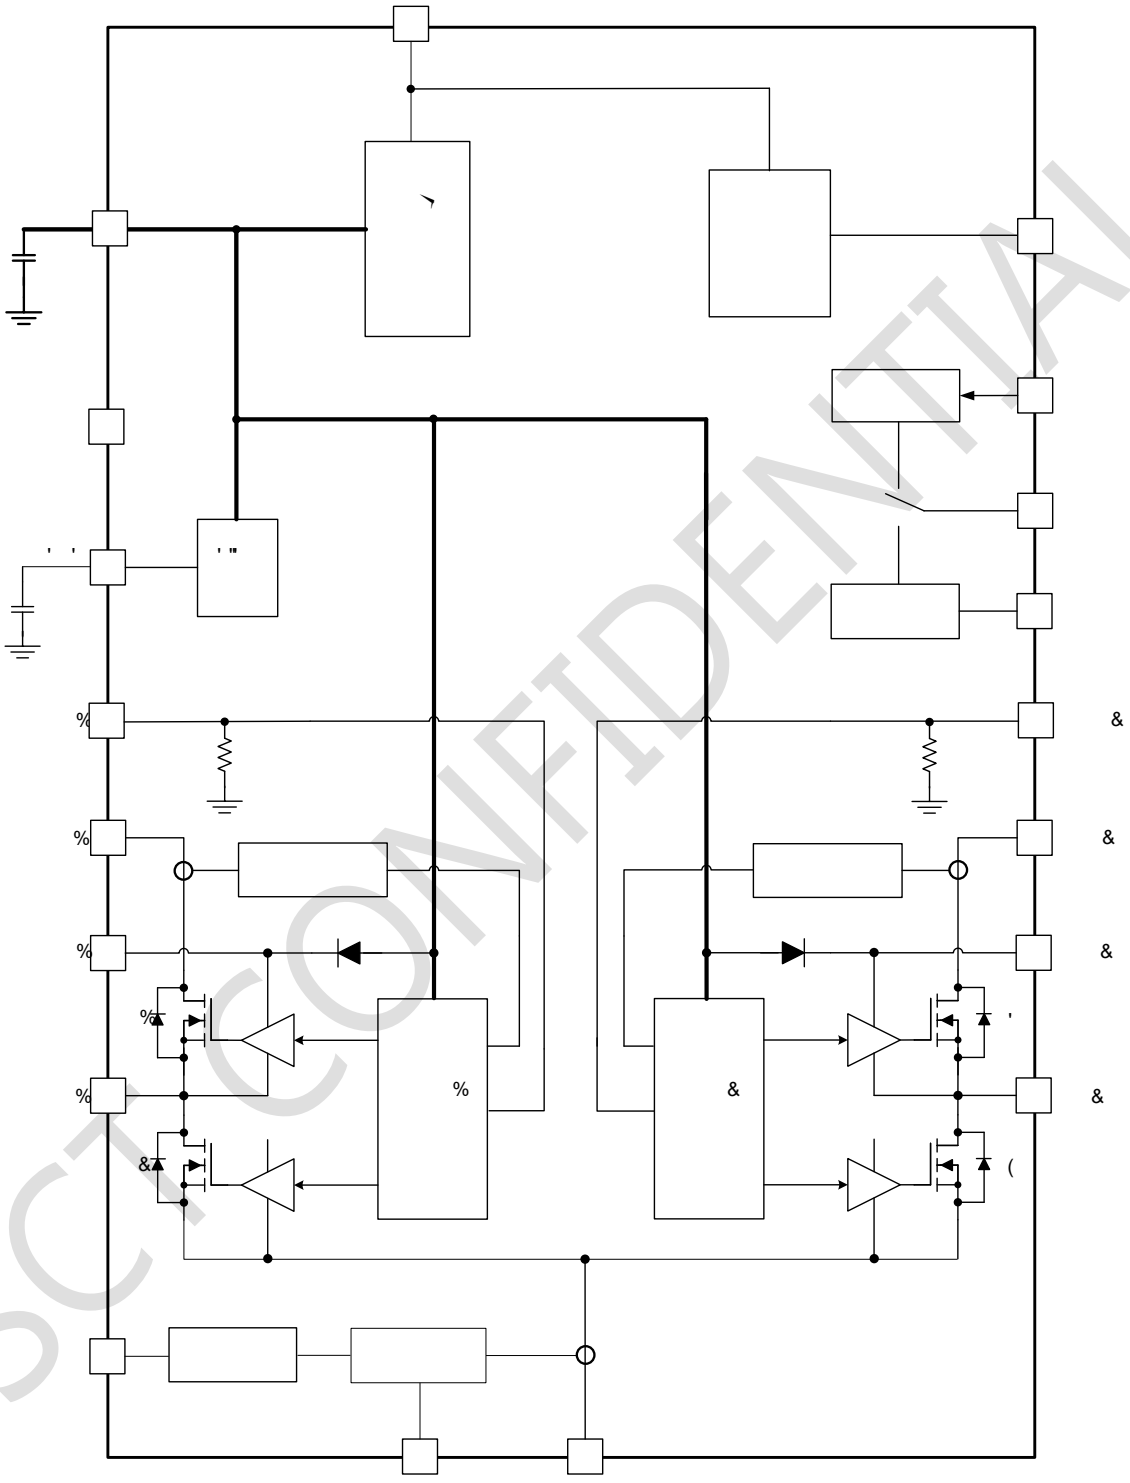

SCT CONFIDENTIAL

OPERATION

SCT CONFIDENTIAL

SCT CONFIDENTIAL

SCT CONFIDENTIAL

APPLICATION INFORMATION

SCT CONFIDENTIAL

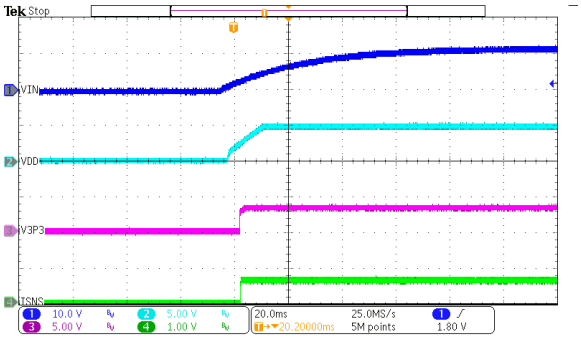
Tek Stop
VIN
VDD
V3P3
TSNS
10.0 V
5.00 V
1.00 V
20.0ms
20.20000ms
25.0MS/s
5M points
1.80 V

%%"

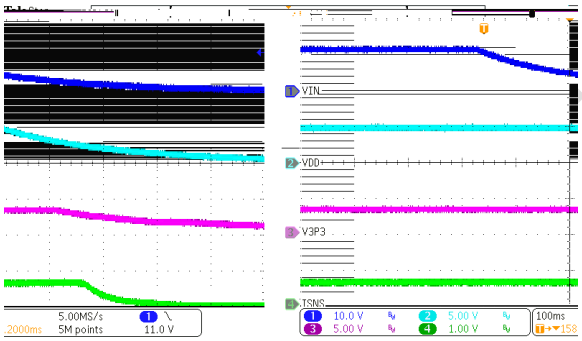
VIN
VDD
V3P3
TSNS
5.00MS/s
5M points
11.0 V
2000ms
10.0 V
5.00 V
1.00 V
100ms

%&"

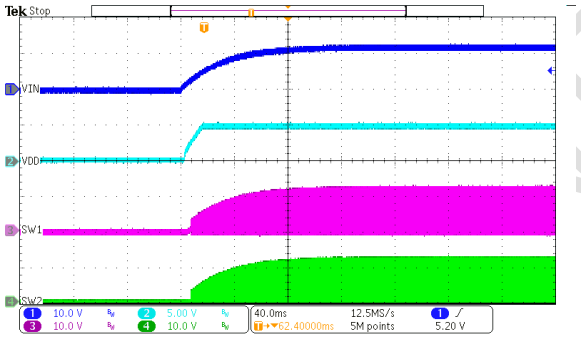
Tek Stop
VIN
VDD
SW1
SW2
10.0 V
5.00 V
40.0ms
12.5MS/s
5M points
5.20 V

% "

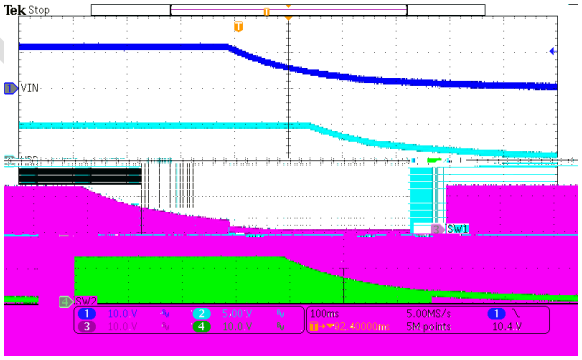
Tek Stop
VIN
SW1
SW2
10.0 V
100ms
5.00MS/s
5M points
10.4 V

% "

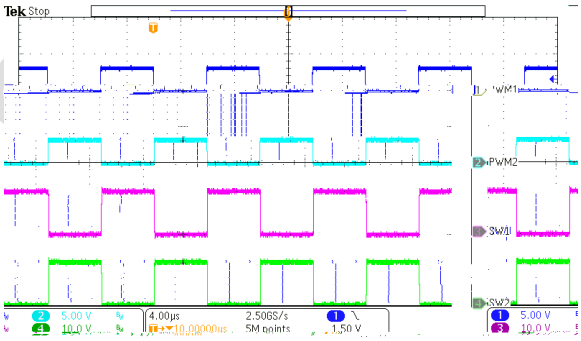
Tek Stop
PWM1
PWM2
SW1
SW2
5.00 V
10.0 V
4.00µs
2.50GS/s
5M points
1.50 V

% " %& %

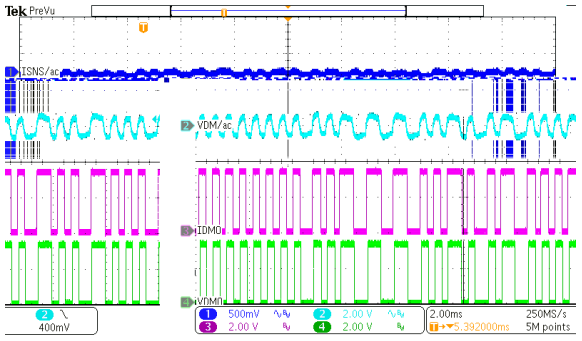
Tek PreVu
ISNS/ac
VDM/ac
IDMD
VDMD
400mV
500mV
2.00 V
2.00ms
250MS/s
5M points
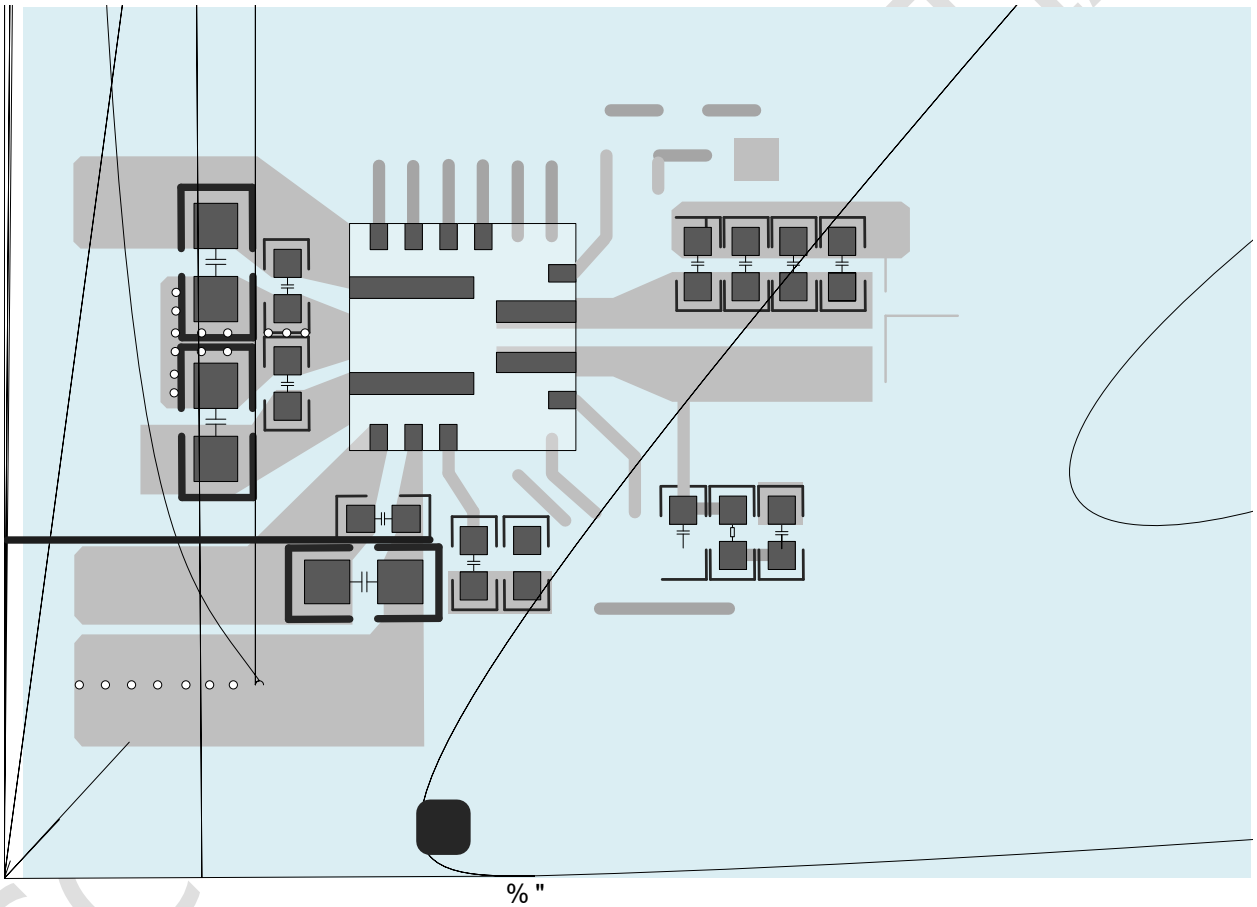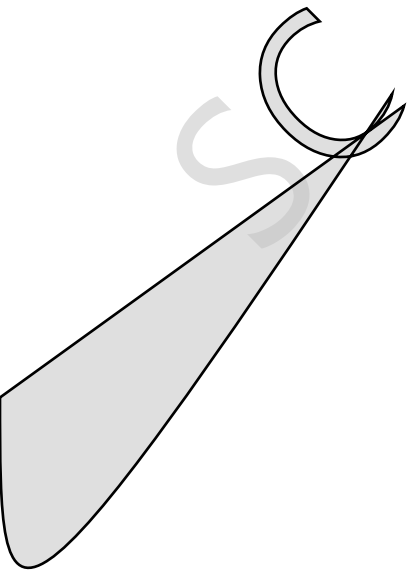
% "